


CHIPPING HAMMERS

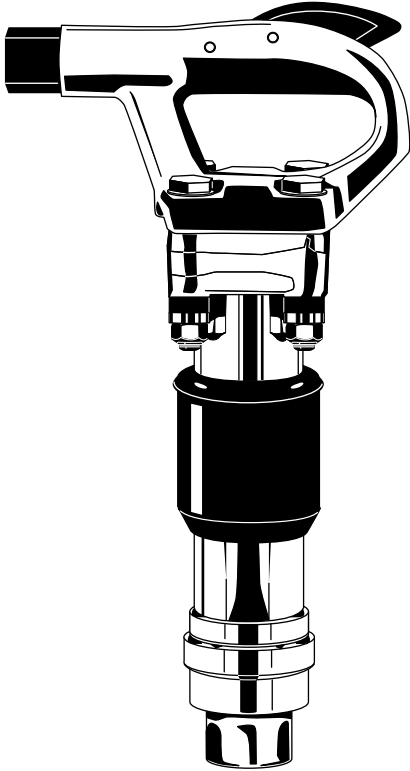

The Sullair Chipping Hammer is designed for rugged dependability. Check these features.

Four Bolt Backhead

This unique design reduces handle breakage. The common problem of a threaded handle-to-barrel connection coming loose and damaging the handle and internal parts has been eliminated.

D-Handle

The strong "D" configuration is large enough to provide a comfortable, sure grip, even for a gloved hand.

Minimal Lubrication Required

With its unique design and materials, normal oil carry-over from the compressor, combined with moisture in the air, will usually provide sufficient lubrication under normal operating conditions.

Smoother Operation

The Sullair chipping hammer's unique backhead design results in greater operator comfort.

Choice of Stroke Length and Bushings

The Sullair chipping hammer is available in 2", 3" and 4" strokes with either .680 round or .580 hex bushings.

Choice of Retainers

Oval collar retainers are included as standard. Optional retainers available are universal ball type, round collar, or quick change segment retainers.

Exhaust Deflector

A durable molded exhaust deflector directs exhaust air away from the operator.

Air Inlet Option

Two air inlet bushings are furnished: $\frac{3}{8}$ " NPT and $\frac{7}{8}$ -24, internal thread. The bushings provide for versatile hose connections while protecting the handle inlet threads.

Limited Parts Warranty

Sullair provides a limited parts warranty of two years on the handle and one year on all other parts except the retainer and retainer springs. In addition, should a part other than the retainer or retainer spring wear out during normal operation, it is covered by Sullair's exclusive chipping hammer warranty.

CHIPPING HAMMER DESIGN SPECIFICATIONS

Model	Weight lbs	Length in	Bore & Stroke in	Impact Rate blows/min	Air Consumption cfm	Air Inlet Diameter in	Shipping Weight lbs	Chuck Size
MCH-2	16 ⁵ / ₈	14"	1 ¹ / ₈ " x 3"	2300	26	3/8" NPT or 7/8-24	18	.680 round .580 hex
MCH-3	17 ³ / ₄	15 ¹ / ₄ "	1 ¹ / ₈ " x 3 ³ / ₄ "	2100	29	3/8" NPT or 7/8-24	19	.680 round .580 hex
MCH-4	18 ⁵ / ₈	16 ¹ / ₂ "	1 ¹ / ₈ " x 4 ¹ / ₄ "	1700	33	3/8" NPT or 7/8-24	20	.680 round .580 hex
MLC-10	12	14 ¹ / ₂ "	1 ⁷ / ₆₄ " x 1 ¹³ / ₁₆ "	2940	18	3/8" NPT or 7/8-24	14	.680 round .580 hex



ISO 9001 certification has been earned
by the company's North American and
European manufacturing facilities.



SULLAIR CORPORATION, Subsidiary of Sundstrand Corporation, 3700 East Michigan Blvd., Michigan City, IN 46360 Telephone: 1-800-SULLAIR or 1-219-879-5451 Fax: 1-219-874-1504
SULLAIR EUROPE, Zone des Granges, BP 82, 42602 Montbrison, Cedex, France, Telephone: (33) 4.77.96.84.70 Fax: (33) 4.77.96.84.99
SULLAIR ASIA LTD., 74 Joo Koon Circle, Jurong, Singapore 629093, Telephone: (65) 861-1211 Fax: (65) 861-2967 Telex RS25117
SULLAIR ASIA, 1 Sullair Road, Chiwan, Shenzhen, China 518068, Telephone: (86) 755-6853477 or (86) 755-6851686 Fax: (86) 755-6853473
SULLAIR TAIWAN LTD., 2nd Fl. No. 96, Chien Kuo N. Road, Taipei 104, Taiwan, Telephone: 886-2-505-7256, Fax: 886-2-505-5480
SULLAIR ARGENTINA, Goncalves Dias 1145, 1276 Buenos Aires, Argentina, Telephone: 541-303-0621, Fax: 541-303-0626

Specifications subject to change without notice. © Copyright 1997 Sullair Corporation. All rights reserved.